

FASHION FOR WALLS

ITALIA METALLIC SERIES







| FASHION FOR WALLS |

ITALIA TRE

CEMENT METALLIC-TEXTURED
WALL PAINT



Partnership with **VALLS**®

14 SEE SEE SEE SEE

Distributed by **SF CREATIONS**









ITALIA TRE



Step 1 Apply 2 coat of Italia Primer 8000 (allow 30minutes touch dry or 2-3Hours Hard dry before continue the 2nd Coat repeat).




Apply Italia TRE randomly using Brush to cover all the surface.



Step 3 Once Surface partially dry from (Step 2) allow 10-20 minutes semi dry. Use A Round Sander tool or Plastic Trowel to do a randomly burnish effect.



Step 4 Do one more final randomly burnish effect to create more texture look.




Step 1 Apply 2 coat of Italia Primer 8000 (Allow 15~30 minutes dry between the layers)



Step 2 Apply Italia TRE randomly using Trowel or Scraper to create the texture effect.



Step 3 Apply again randomly using Trowel or Scraper to ensure all surface covered.



Step 4 To create the Cement Texture do one more randomly burnish around the texture coat make it smoother.

Usage For decorative of interior walls, ceilings, brickwork and cement boards with a unique shimmering finish.

Pack Size 1 liter & 2.5 liters.

Pigment Binder Composition : Inorganic

Polymer emulsion

Vehicle

Technical Data Texture

Colour

: Shimmering Wavy Texture Finish
: Refer to SANCora® ITALIATM TRE colour card
: Approx. 7 – 9m2 / liter (Depending on surface condition and application technique) Theoretical Coverage

Drying Time Single coat (28°C, 50% RH)

: Touch Dry ≤ 1 hours : Hard Dry ≤ 1 day

Recoating Time 2 hours Thinner/Cleaner Water

Roller & Trowel **Application**

: For normal use, thinning is not necessary.

Apply first coat using roller and after thorough drying, apply the second coat by roller then spread and level

by trowel when the paint is still wet until desired

effect is achieved.

: Surfaces must be sound, clean, dry and free from all defective or poorly adhering materials, dirt, **Surface** General/New

grease or wax. To have better finish, rub down surface using suitable abrasive and dust off.

Preparation PreviouslynPainted Remove all loose, defective and unstable paint

film or powdery residue by brushing thoroughly and scraping. Repair minor defects and cracks

with suitable filler.

Shelf Life 2 years at ambient temperature in unopened containers.





Project Reference

SANCora® ITALIA™ TRE Neutral Coat is a water-based ecological interior texture wall paint. It combines authentic wavy effect with spectrum array of elegant colors gives distinctive and unique glamour textured effect able to blend in harmoniously with modern or classic style home environment.



TR 04 MARS GREY

ITALIA TRE

CEMENT METALLIC-TEXTURED
WALL PAINT




TR 13 SPACE GREY








ITALIA" CINQUE

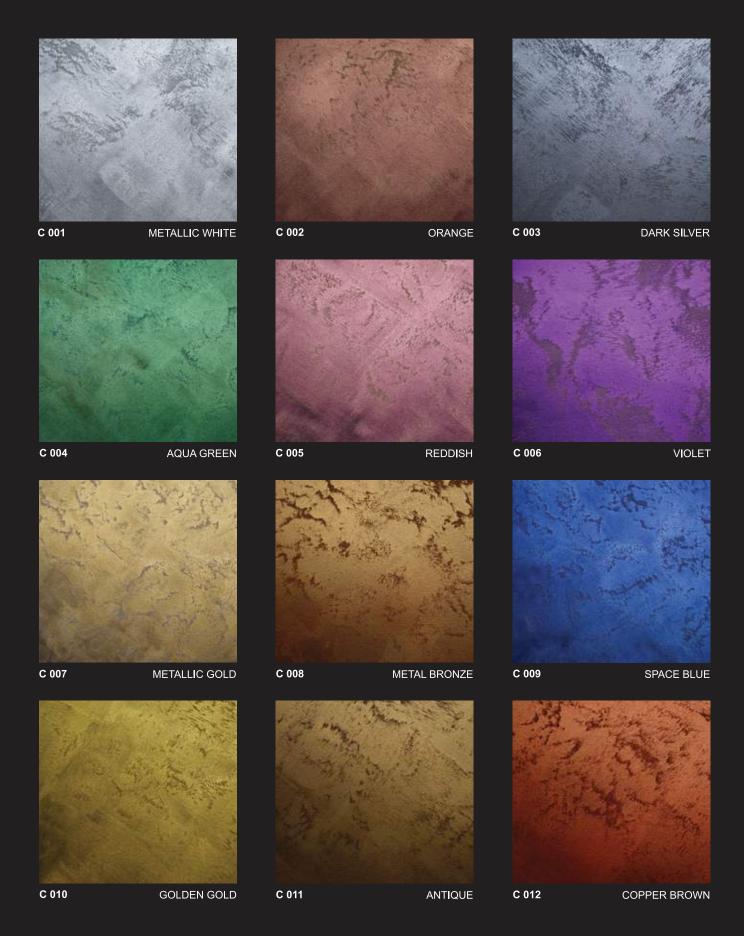

ITALIA" CINQUE

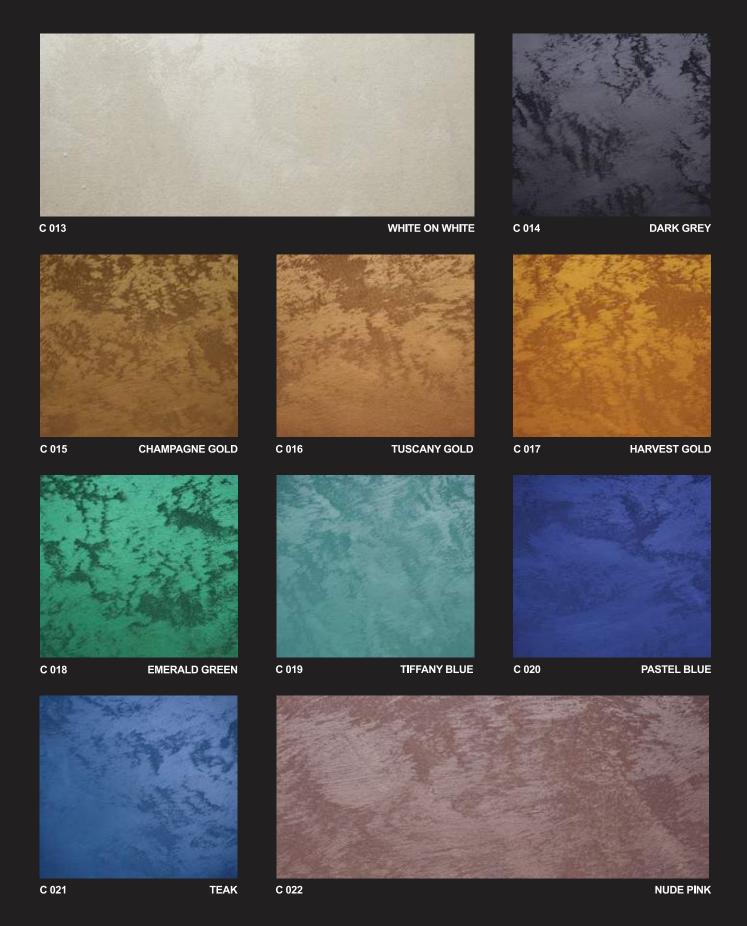

ITALIA" CINQUE



ITALIA CINQUE




Step 1 Apply 2 coat of Italia Primer 8000 (allow 30minutes touch dry or 2-3Hours Hard dry before continue the 2nd Coat repeat).



Apply 1st Layer of Italia CINQUE using Brush with X Cross method to cover all the surface.



Step 3 Apply 2nd Layer of Italia CINQUE using Brush just cover the balance of not painted area.



Step 4 Without dipping Italia CINQUE paint on this step, using empty Brush to brush X Cross method to create randomly effect.



Step 5 (Optional) Without dipping Italia CINQUE paint, using empty brush to randomly effect again.

Usage For decorative of interior walls, ceilings, brickwork and cement boards with a unique shimmering finish.

Pack Size 1 litre, 2.5 litres & 15 litres.

Pigment Binder Composition : Inorganic

Polymer emulsion

Vehicle

Technical Data Texture : Sand Texture Finish

Refer to SANCora® ITALIATM CINQUE colour card Colour

Theoretical Coverage : Approx. 5 - 7m2 /litre (Depending on surface condition and application technique)

Drying Time Single coat at standard thickness (28°C, 50% RH) Touch Dry ≤ 3 hours

: Hard Dry ≤ 8 hours Not Necessary

Recoating Time Thinner/Cleaner : Water

: For normal use, thinning is not necessary. Apply using *SANCora*® ITALIA™ Brush. **Application** Brush

Surface General/New : Surfaces must be sound, clean, dry and free from

all defective or poorly adhering materials, dirt, grease or wax. To have better finish, rub down surface using suitable abrasive and dust off.

Preparation PreviouslynPainted Remove all loose, defective and unstable paint film or powdery residue by brushing thoroughly

cand scraping. Repair minor defects and

cracks with suitable filler.

Shelf Life 2 years at ambient temperature in unopened containers.





SAND METALLIC-TEXTURED
WALL PAINT

Project Reference

SANCora® ITALIA™ CINQUE is a water-based ecological interior texture wall paint. Produced with selective choice of raw material, ITALIA™ CINQUE is tint able with various pearl pigments to offer colorful shimmering effect. It has been develop to give your wall intriguing, wavering & light flickering effect recreating light and shadow of your wall to breath in new life into the room of your home.

ITALIA CINQUE

SAND METALLIC-TEXTURED
WALL PAINT



C 004 AQUA GREEN



C 001 METALLIC WHITE

ITALIA TEXTURED SERIES



- Stone-Textured Finishing
- Ecological Product



ITALIA" UNO

- Metallic Stone-Textured Finishing
- Ecological Product

ITALIA DUE

Duotone Metallic-Textured Wall Paint

- Duotone Metallic-Textured Finishing
- Ecological Product
- Effect of Shadow and Chiaroscuro



Snow-Textured Paint Enhancer

- Brush-on to All Emulsion Paint Surfaces
- Snow-Textured Finishing
- Ecological Product
- Easy Application
- 1 Coat Finishing







ITALIA TRE

Cement Metallic-Textured Wall Paint

- Velvet & Smooth Finishing
- Ecological Product
- Effect of Shadow and Chiaroscuro

ITALIA" CINQUE

Sand Metallic-Textured Wall Paint

- Sand Finishing
- Ecological Product
- Effect of Shadow and Chiaroscuro

ITALIA" QUATRO

Matt Cement-Textured Wall Paint

- Matt Cement Textured Finishing
- Ecological Product





Paint Manufacturer SANCORA PAINTS INDUSTRIES SON BHD 197401002682 (19733-T)

(Wholly Owned Subsidiary Of Kansai Paint Asia Pacific Sdn Bhd)

Lot 8206, Kawasan Perusahaan Kamunting, 34600 Kamunting, Perak, Malaysia. Tel +605-891 8777 (8 lines) Fax +605-891 2277 Email info@sancora.com Website www.sancora.com Facebook www.facebook.com/sancorapaint





