

SAN Cora[®]
PAINT

| FASHION FOR WALLS |

ITALIA[™] UNO

STONE-TEXTURED
WALL PAINT



SIRIM
ECO-LABEL
SIRIM CERTIFIED BY SIRIM
Certification No.: SLO00004

ITALIATM UNO

STONE-TEXTURED
WALL PAINT

Colour A



A1



A2



A3

Colour B



B1




B2



B3


Colour D

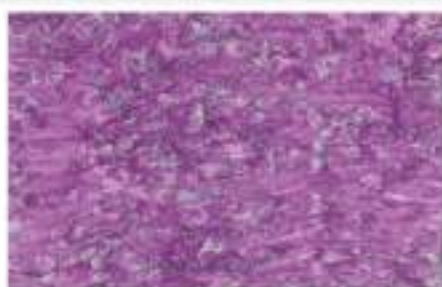

D1




D2

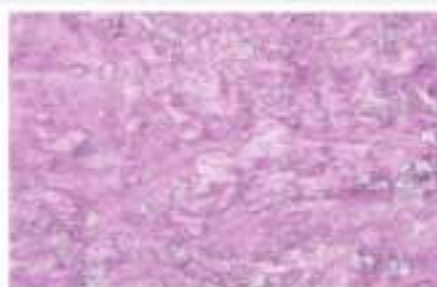


D3

Colour F

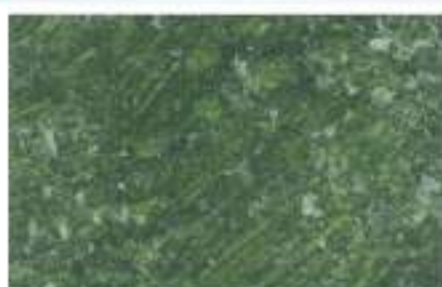

F1

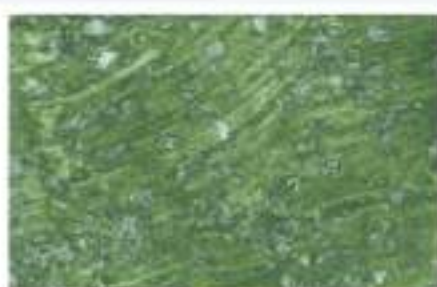

F2



F3

PAINT INFORMATION

Description

SANCORA® ITALIA™ UNO is a revolutionized decorative paint using Italy technology. It is an ecological product made from natural oxide and top quality resin in a water-based system. The extraordinary effects from **SANCORA® ITALIA™ UNO** let you fill your room with variety of colour combination with aesthetic & classic sensation.

Usage

For decorative of interior walls, ceilings, brickwork and cement boards with a classic aesthetic effect finish.

Pack Size

1 liter & 2.5 liter.

Technical Data

Texture	- Classic aesthetic effect finish
Colour	- Refer to SANCORA® ITALIA™ UNO colourant
Theoretical Coverage	- Approx. 7 - 9m ² / litre (Depending on surface evenness)
Drying Time	- Single coat at standard thickness (25°C, 50% RH) Touch Dry < 3 hours Hard Dry < 3 days
Recoating Time	- Not Necessary
Thinner / Cleaner	- Water

Surface Preparation

General / New	- Surfaces must be sound, clean, dry and free from all defective or poorly adhering materials, dirt, grease or oils. To have better finish, rub down surface using suitable abrasive and dust off.
Previously Painted	- Remove all loose, defective and unstable paint film or powdery residue by brushing thoroughly and scraping. Repair minor defects and cracks with suitable filler.

Shelf Life

2 years at ambient temperature in unopened containers.

Safety, Health and Environmental Information

Refer to Safety Data Sheet (SDS) for complete product safety information.

Penerangan

SANCORA® ITALIA™ UNO merupakan cat penghiasan evolusi baru dengan teknologi: tak hanya satu produk ekologi dibuat daripada natural oxide dan resin kualiti tinggi dalam sistem cat air. Kesan yang luar biasa daripada **SANCORA® ITALIA™ UNO** membolehkan anda untuk memenuhi bilik anda dengan pelbagai kombinasi warna yang memberikan sensasi klasik & estetik.

Penggunaan

Untuk penghiasan dinding dalaman, siling, batu bata dan papan semen dengan kemasan klasik dan estetik.

Pak Saiz

1 liter & 2.5 liter.

Data Teknikal

Texture	- Klasik dan estetik kemasan
Warna	- Rujuk kepada kod warna SANCORA® ITALIA™ UNO
Liputan Teori	- Anggaran: 7-9m ² / liter (Bergantung pada ketidaksamaan permukaan)
Tempoh Kering	- Satu lapisan dengan ketebalan standard (25°C, 50% RH) Kering disentuh < 3 jam Kering sempurna < 3 hari
Tempoh Lapisan Semula	- Tidak Perlu
Pencuci / Pembersih	- Air

Persediaan Permukaan

Umum / Baru	- Permukaan mestilah bersih, kering dan bebas daripada sebarang kotoran atau bahan mudah mekik, meyak dan lici. Untuk mendapatkan kemasan akhir yang sempurna, gosok permukaan dengan menggosokkan kanvas padar yang sesuai dan penyapu debu.
Pernah Dicat	- Singkalkan semua permukaan cat yang mekik dan tidak stabil atau sili halus dengan menggosok dan mengkilat secara teliti. Baki kecacatan permukaan atau rekahan kecil dengan filler yang sesuai.

Jangka Hayat

2 tahun pada suhu bilik dalam bekas tertutup.

Infomasi Keselamatan, Kesihatan dan Persekitaran

Rujuk kepada lembaran Safety Data Sheet (SDS) untuk maklumat yang lebih terperinci.

PAINT PREPARATION

ITALIA SERIES PRIMER

*** READY FOR USE

Primer Code

1000 Primer "Pure White"



ITALIA™ UNO Neutral Coat

*** Neutral Coat add colourant

Neutral Coat Code

Refer to ITALIA UNO COLOR CARD



PAINT APPLICATION

1. Apply 2 coats of ITALIA™ SERIES Primer with roller. Make sure the 1st coat is thoroughly dry (1-2 hours) before applying the 2nd coat. Let the 2nd coat thoroughly dry (3 hours) before applying ITALIA™ UNO Neutral Coat.
2. Apply 1 coat of ITALIA™ UNO Neutral Coat with SANCORA® ITALIA™ brush by using Method I - Cross-X Strokes or Method II - Arch Strokes. Following the same procedure, complete the decoration on the entire wall surface.

Method I - Cross-X Strokes



OR

Method II - Arch Strokes



SAN Cora®
PAINT

KANSAI PAINT

Paint Manufacturer

SANCORA PAINTS INDUSTRIES SDN BHD (19735-T)

(Wholly Owned Subsidiary Of Kansai Paints Asia Pacific SDN BHD)

Lot 8206, Kawasan Perusahaan Kamunting, 34000 Kamunting, Perak, Malaysia.

Tel +605-891 6777 (8 lines) Fax +605-891 2277 Email info@sancora.com

Website www.sancora.com Facebook www.facebook.com/sancorapaint

Quality Management System Certification By:



Intertek



ISO 9001



UKAS

Made on SANCORA®

