



SAN Cora[®]
PAINT

| FASHION FOR WALLS |

ITALIA[™] UNO⁺


METALLIC STONE-TEXTURED
WALL PAINT



SIRIM
ECOLABEL
LOW VOC
FORM C125/10A E11: 2012
Lecce, Italy - 0500000

ITALIATM UNO⁺

METALLIC STONE-TEXTURED
WALL PAINT

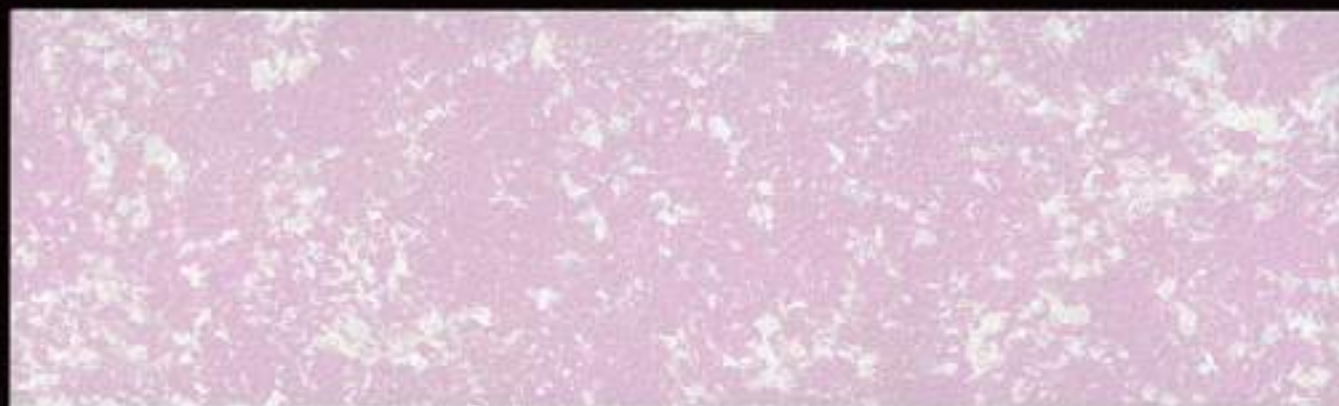

1023-02 Indigo Violet



1027-02 Pasture Violet



1003-02 Lucida Violet



1024-02 Milan Violet



1004-03 Magia Blue



1025-03 Astrono Blue



1018-05 Euphoria Green



1002-05 Calma Green

Give your walls the royal treatment



1005-04 Libero Red



1021-06 Vintage Orange




1020-04 Nova Red



1014-01 Magnifico Gold




1026-01 Nurture Gold

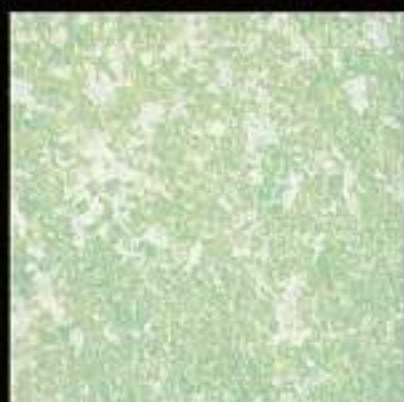

1022-01 Emerald Gold



1019-01 Athena Gold

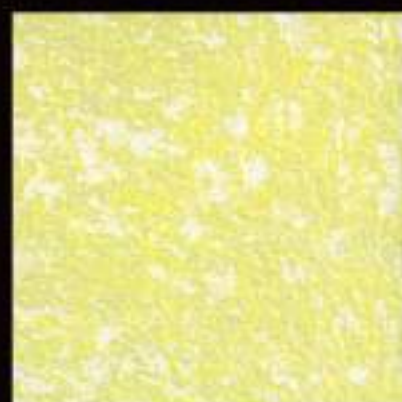

1016-01 Glorioso Gold

PAINT INFORMATION

Description

SANCORA® ITALIA™ UNO™ is an evolved formula from **SANCORA® ITALIA™** with enhanced ecological water-based system properties providing enhanced texture effect. **SANCORA® ITALIA™ UNO™** combines aesthetic texture with iridescent light tricks to render a classic & metallic effect finish.

Usage

For decorative of interior walls, ceilings, brickwork and cement boards with a classic & metallic effect finish.

Pack Size

1 litre and 2.5 litres

Technical Data

Texture	- Unique Pearlescent Finish
Colour	- Refer to SANCORA® ITALIA™ UNO™ colourcard
Theoretical Coverage	- Approx. 7 m ² / litre (Depending on surface evenness)
Drying Time	- Single coat at standard thickness (25°C, 50% RH) Touch Dry < 3 hours Hard Dry < 3 days
Recoating Time	- Not Necessary
Thinner / Cleaner	- Water

Surface Preparation

General / New	- Surfaces must be sound, clean, dry and free from all defective or poorly adhering materials, dirt, grease or wax. To have better finish, rub down surface using suitable abrasive and dust off.
Previously Painted	- Remove all loose, defective and unstable paint film or powdery residue by brushing thoroughly and scraping. Repair minor defects and cracks with suitable filler.

Shelf Life

2 years at ambient temperature in unopened containers.

Safety, Health and Environmental Information

Refer to Safety Data Sheet (SDS) for complete product safety information.

Pencerangan

SANCORA® ITALIA™ UNO™ adalah formula yang evolusi daripada **SANCORA® ITALIA™** dengan meningkatkan ciri-ciri sistem ekologi berasaskan air yang memberikan kesan tekstur yang diperincikan.

SANCORA® ITALIA™ UNO™ menggabungkan tekstur estetik dengan helahan cahaya yang terang untuk memberikan hasil kemasan klasik & metalik.

Penggunaan

Untuk perhiasan dinding dalaman, siling, batu-bata dan papan simen dengan hasil kemasan klasik & metalik.

Saiz Pembungkusan

1 liter dan 2.5 liter

Data Teknikal

Tekstur	- Kemasan Metalik Yang Unik
Warna	- Rujuk kepada kad warna SANCORA® ITALIA™ UNO™
Liputan Teori	- Anggaran 7 m ² / liter (Bergantung pada ketidapern permukaan)
Tempoh Kering	- Satu lapisan dengan ketebalan standard (25°C, 50% RH) Kering Disentuh < 3 jam Kering Sampurna < 3 hari
Tempoh Lapisan Semula	- Tidak Perlu
Pencuci / Pembersih	- Air

Persediaan Permukaan

Umum / Baru	- Permukaan mesti bersih, kering dan bebas daripada sebarang seketoran, minyak atau wax. Untuk pengkotakan lebih baik, gosok permukaan dengan kertas kasar yang sesuai.
Pernah Dicat	- Tanggalkan semua cat yang mengelupas, baki bersebuk dan bercahaya. Kembalikan permukaan yang ringan haruslah dibersihkan dengan menggunakan filler yang sesuai.

Jangka Hayat

2 tahun pada suhu ambien dalam bekas tertutup.

Informasi Keselamatan, Kesihatan dan Persekitaran

Rujuk kepada lembaran Safety Data Sheet (SDS) untuk maklumat yang lebih terperinci.

PAINT PREPARATION

ITALIA™ SERIES PRIMER

→ 2000 Primer "Pure White" with colorant and tint using CTS machine



ITALIA™ UNO™ Neutral Coat

→ Neutral Coat add Pearl Agent

Neutral Coat Code

Refer to ITALIA UNO™ COLOR CARD



PAINT APPLICATION

1. Apply 2 coats of **ITALIA™ SERIES PRIMER** with roller. Make sure the 1st coat is thoroughly dry (1-2 hours) before applying the 2nd coat. Let the 2nd coat thoroughly dry (3 hours) before applying **ITALIA™ UNO™ Neutral Coat**.
2. Apply 1 coat of **ITALIA™ UNO™ Neutral Coat** with **SANCORA® ITALIA™ Break** by using Method I - Cross Strokes or Method A - Arch Strokes. Following the same procedure, complete the decoration on the entire wall surface.

Method I - Cross-X Strokes



OR

Method A - Arch Strokes



SAN Cora
PAINT

Part of **KANSAI PAINT**

Paint Manufacturer
SANCORA PAINTS INDUSTRIES SDN BHD
19740102682 (+603-730-730-730)
(Wholly Owned Subsidiary of Kansai Paint Asia Pacific SDN BHD)

Lot 8206, Kawasan Perusahaan Kamunting, 34600 Kamunting, Perak, Malaysia.
Tel: +605-891 8777 (8 lines) Fax: +605-891 2277 Email: info@sancora.com
Website: www.sancora.com Facebook: www.facebook.com/sancorapaint

Quality and Environmental Management System
ISO 9001:2015 and ISO 14001

More on SANCORA

